


Axe Integrator Controls

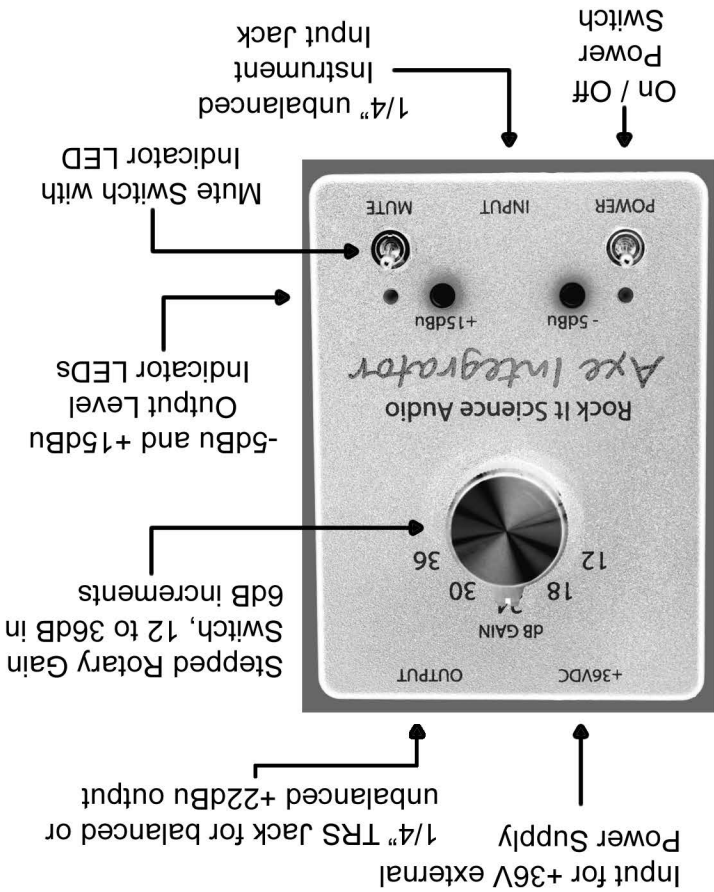

Axe Integrator Specifications

Maximum Input Level +10dBu
 Maximum Output Level +22dBu
 Input Impedance >1.5 Megohm
 Frequency Response 20 to 20k \pm 0.15dB
 Dynamic Range >104dB
 THD008% @ +4dBu output
 THD058% @ +22dBu (primarily 2nd harmonic)
 Output Impedance 600 Ohms (transformer)
 Power Consumption 40mA @36VDC

For more info visit www.RockItScienceAudio.com

The Axe Integrator warranty covers failure of any parts and the labor to replace them for 2 years from the date of purchase. Damage caused from negligence or abuse is excluded. Units purchased through retail distributors should be registered by the end user on the Rock It Science Audio website. Units purchased direct are registered automatically. Warranty is non-transferable.

Warranty or non-warranty repairs, or product returns require an RMA number issued prior to shipping. See the Support/RMA Form page on the website for details.

AXE INTEGRATOR INSTRUMENT PREAMPLIFIER OPERATOR INFORMATION



**ROCK IT SCIENCE AUDIO
HOLLYWOOD, CA
MADE IN USA**

When using the Axe Integrator for the first time, its good practice to start with the rotary Gain Switch at the lowest (12dB) setting and play the instrument while watching the output level Indicator LEDs. A properly adjusted signal level will cause constant flashing of the Yellow -5dBu LED with occasional flashing of the Red +15dBu LED. However, while most professional audio equipment will handle the +22dBu output level, other equipment types may become overloaded, causing distortion to be heard. The gain should be adjusted to accommodate both instrument type and output destination accordingly.

The Mute Switch should be set in the mute position (down) when turning the Power Switch on or off, and while making other connections. The green Mute LED indicates that the Mute is disabled and the audio signal is active.

The Axe Integrator runs on +36 Volts DC that is provided by the included external power supply. It is recommended to keep the Power Switch off when connecting the power supply. Do not attempt to use any power supply other than the one that ships with the Axe Integrator or damage could occur that will void the warranty.

The Axe Integrator is an All-Discrete Class A transformer coupled Instrument Preamplifier designed for high-quality studio recording of acoustic or electric guitar, bass, and any other instrument with built-in pickups that requires a high impedance input.